


clickGO™



 110

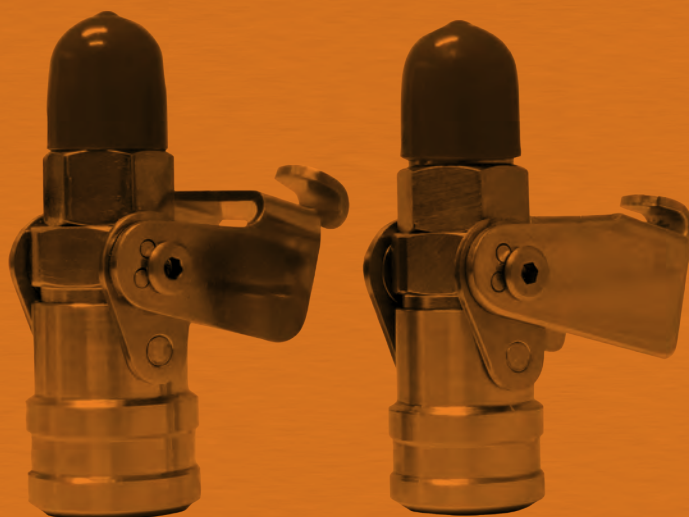

The G110 Series is an excellent choice for copper tube sealing in air conditioning, refrigerator and compressor production lines. This series is suitable for leak testing, gas charging and vacuum applications



**DOUBLE SEALING INSIDE**

PART #	G110 QC6353	G110 QC9523
<b>Discription</b>	Quick Clamp Coupling	
Size (Inches)	1/4"	3/8"
Work Pressure	30-42 Kg / cm <sup>2</sup>	
Max. Pressure	45 Kg / cm <sup>2</sup>	
Types of Fluid	R134a, R22, R407, R410a etc.	
Material Choices	SUS, Alu, Brass, Steel Alloys	
Seal Materials	HNBR, FKM, NBR, CR	

**MAIN FEATURES**

- Designed for easy clamping on straight copper tubes.
- Flaring and welding of the copper tube not required.
- A firm grip on the copper tube is ensured by the collet chuck.
- Double seal construction ensuring the pipe end and the outer diameter of the tube are sealed simultaneously for a leak free connection.
- Can withstand a vacuum of 1.3 x 10<sup>-1</sup> pa.



**DIRECT CLAMPING STRAIGHT COPPER TUBES**

**DISTRIBUTOR / DEALER**