


clickGO™



G150

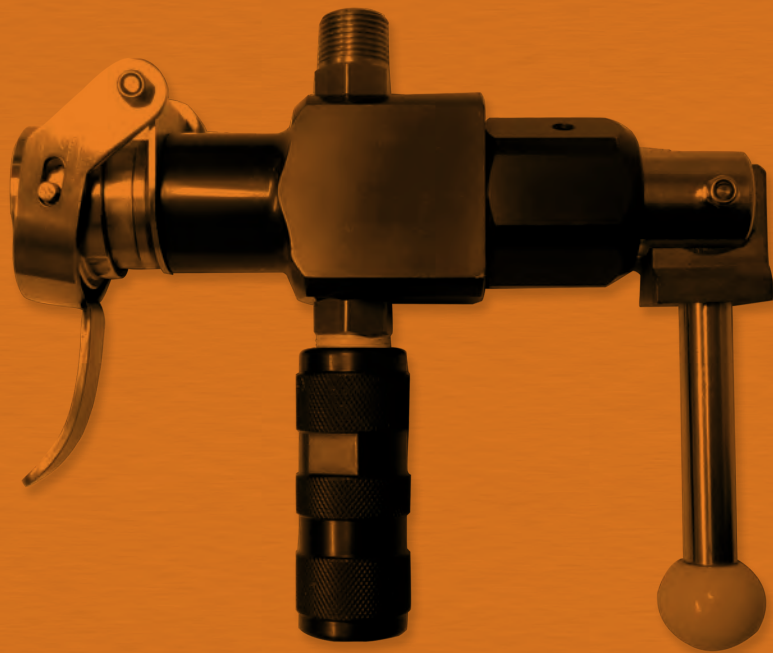

The G150 Series is easy to (dis)connect under high pressure with a simple lever action, and is mainly used in large volume production lines of air conditioners to improve process productivity.



**CONNECTS/DISCONNECTS EASILY AND QUICKLY UNDER HIGH PRESSURE**

**MAIN FEATURES**

- Built-in auto shut off valve preventing gas / fluid flowing out
- Equipped with a double O-ring packing inside the socket
- Usable in high pressure applications up to 50 Kg / cm<sup>2</sup>
- Designed for air conditioner charging test line applications
- Enables charging of refrigerant gas, vacuum exhausting or residual pressure discharge

PART #	G150 CG0635	G150 CG0952
<b>Description</b>	Gas Charging Gun	
Size (Inches)	1/4"	3/8"
Work Pressure	50 Kg / cm <sup>2</sup>	
Max. Pressure	100 Kg / cm <sup>2</sup>	
Types of Fluid	R134a, R22, R407, R410a etc.	
Materials Choices	SUS, Alu, Brass, Steel Alloys	
Seal Materials	HNBR, FKM, NBR, CR	

**AIR-CON AND REFRIGERANT GAS CHARGING**



**DISTRIBUTOR / DEALER**